

APR 2005



REC'D 31 OCT 2003

WIPO PCT

# Kongeriget Danmark

Patent application No.: PA 2002 01468


Date of filing: 02 October 2002

Applicant:  
(Name and address) Ratco ApS  
Nystedvej 4  
DK-4930 Maribo  
Denmark

Title: An Electrocution Animal Trap with a Sender.

IPC: -

This is to certify that the attached documents are exact copies of the above mentioned patent application as originally filed.



Patent- og Varemærkestyrelsen  
Økonomi- og Erhvervsministeriet

20 October 2003

John Nielsen

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

**AN ELECTROCUTION ANIMAL TRAP WITH A SENDER**

PVS

**Field of the invention**

- 5 The present invention relates to a device for trapping and dispatching small animals such as rats and mice through electrocution. In particular, the invention relates to a trap which can operate without being attended to.

**Description of prior art**

- 10 The extermination of noxious animals is a well-known problem. In a common approach the noxious animals are captured and killed in a trap. Several types of traps have been developed. The present invention deals with a trap, wherein the executing means is electrocution. In an electrocuting trap the animal is killed by an electrical current that is drawn through the body of the captured animal. Several types of electrocution traps have  
15 already been described, for example in the patents US 1,038,902; US 5,918,409; US 5,949,636 and in the application FR 2 758 435 - A1. In such traps a bait or lure is placed inside a housing with one or more entrances. Between the entrance(s) and the bait a configuration of electrodes is present. The inside of the trap is designed in such a way that, if an animal tries to reach the bait, the animal inevitably touches the electrodes and  
20 thereby gets electrocuted.

- None of the previously described traps, however, deal with the situation where regular control of the traps is inconvenient. Such situations can be encountered if the trap is located at a place, which is difficult to access. Or, if a large number of traps are in operation, e.g. in a city-extermination program, where a network of traps are placed in a  
25 sewer system. Surveillance of such a trap system requires considerable efforts, if all traps have to be monitored by subsequently checking all traps one at a time.

**Description of the invention**

- In a first embodiment, the above mentioned problem has been solved by the present  
30 invention by providing an electrically powered animal trap, which comprises  
- a set of electrodes for electrocution of the animal, and  
- means for communicating a surveillance signal between the trap and an external surveillance unit.
- 35 Due to the means for communicating a surveillance signal between a trap and an external unit, the keeper of the trap may know the condition of the trap without direct inspection of the trap. The trap may thus be left unattended for a long period time, where the trap keeper can rest assured, that the trap is fully operational.
- The trap may comprise a bottom section with an upwardly extending sidewall, a top  
40 section, and at least one entrance. The entrance may be either in a sidewall, in the top section of the trap, or anywhere else. Upon entering the trap, the animal enters a chamber, where a bait or lure can be placed in the opposite side of the chamber. The set of electrodes may comprise at least three electrodes, e.g. placed between the entrance and the end section where bait can be placed. The bait may be a liquid dripping in a

controlled way, which ensures a continuous supply of strong scent, it may be in the form of dry pills or tablets, it may be food, or it may be a scent means. The end section may support the arrangement of the bait e.g. from a bait storage by automatically feeding the bait to a trough, and furthermore control the flow of the bait from a storage to ensure

5 optimal dosing. The surface of these electrodes should be rough as rats do not like to step on smooth metallic surfaces. The roughness could be made by adhering metal or plastic shavings to a metal plate in any conventional way, e.g. plastic composites incorporating metal conductive wires or shavings. Another possibility for making the electrode surfaces rough, is by using powder metallurgy. The electrodes should be interconnected in a way

10 such that a first of the electrodes is connected to a second of the electrodes and wherein a third of the electrodes is electrically isolated from the first and second electrodes. A small voltage up to 4,5 V DC should be maintained between the two first electrodes and the third. The source can be a small accumulator, such as a 12 V motorcycle battery. An electronic circuit (a sensor circuit) should be adapted to detect a leak current between the

15 first and the third electrode by detecting the presence of a finite resistance. This will happen when an animal is touching electrode 1, at the same time as it is touching electrode 3. A high-voltage potential difference between the first and the third electrode should then be generated by an additional "power electronics", which can be incorporated with the sensor circuit. The result is that the animal is electrocuted. The high-voltage

20 potential may be in the form of a continuous voltage maintained for a predefined time, or it may be in the form of a series of pulses. The use of pulses may be advantageous, as the animal may be killed faster and less painfully. These pulses may have the form of steps, where each step comprises different voltages kept for different time periods. The pulses may also be in the form of a sinusoidal wave, or it may be a series of short pulses. The

25 electronic circuit should be made in a versatile way where these aspects can be adjusted electronically.

The trap may comprise additional means for detecting the presence of an animal by equipping the trap with a weight sensitive detector, a motion sensitive detector, which may be achieved by using a series of infrared sensors, or a lever arm. These means can be

30 added in order to increase the certainty that an animal is present in the trap, before the high-voltage potential is generated.

The trap is equipped with an exit for removing the electrocuted animal into a receptacle. This receptacle can be an open receptacle as a sewer or a small stream of water into which the dead animal can be dumped by e.g. using a trapdoor in the bottom of

35 the trap. To accommodate a trap in such a situation, the trap may be equipped with lifting means to lift up the trap. The lifting means can be one or more legs that are adjustable in length, for example telescopic legs, i.e. legs where a single or a series of thinner legs are sliding inside a thicker leg, and where a specific length can be maintained by a fixing means. The adjustment of the length of these legs can be facilitated by using pressurized

40 gas in a similar manner as with office chairs. The receptacle may likewise be a sealed container on top of which the trap is fastened. The container can be equipped with a bag in which the dead animals are collected. A bag will ensure easy and hygienic emptying of the trap as no physical contact with the dead animals is needed. The receptacle may contain a chemical bath for dissolving the animal.

The trap is fully automatic and controlled by the electronic circuit. The exit can be actuated either electrically, hydraulically, pneumatically, mechanically or by any combination of these. For example a trapdoor where the locking-unlocking is an electromagnetic tap which unlocks the trapdoor when the electrocution has finished. The trapdoor can be fastened to the trap by a pivotal hinge at one side such that the door opens upon the weight of the dead animal, and tips back due to a counter weight. In another design the trapdoor is also attached at one side with a pivotal hinge, but in this case the opening and closing is controlled by a motor which unrolls and rolls up a piece of string. It is also possible to place the hinges at opposite sides of the trapdoor, such that the trapdoor tips around an axis perpendicular to the axis around which, the trapdoor tip when the hinges are places in the same side of the trapdoor.

As the trap should be raised above the surroundings, an entrance ramp may be needed. The ramp should preferably be constructed in wood as rats like to climb wood. But it may likewise be constructed in plastic, stainless steel or nickel.

As the inside of an electrocution trap is dangerous to touch, a tube or a flexible hose may be mounted in front of the trap entrance. By using a bent tube (or a flexible hose), e.g. an s-form, an elbow form or a zigzag form, a child will not be able to get its arm inside the trap. A trap which has such a mount placed in front of the entrance is therefore a lot safer to place in areas where children may play than other types of traps.

A battery can only supply a limited number of electrocutions before it needs to be recharged. The trap can therefore be equipped with a power adapter that allows connection directly to a power grid. Some traps may be placed at locations where it is not possible to directly connect the trap to a power grid. In this case the trap can be supplied with a battery charger.

The trap should be able to stand flooding if, e.g., it is located in a sewer. This can be achieved by embedding the electronics in a waterproof housing, and furthermore by incorporating a water level detector that transmit an electronic signal, in the case the water level rises above a predetermined level. The electronic circuit should be adapted to react in response to a signal from the water level detector, by disabling the generation of the high-voltage potential.

The electronic circuit could comprise means for storing an identification code for the trap, and/or information relating to the number of captured animals, the remains of the bait, and the battery condition. A display could be included in the electronic circuit, such that the above mentioned trap information may easily be read-out. The electronic circuit could furthermore comprise means for sending out a wireless electromagnetic surveillance signal that can be received and read by an external unit. The signal may comprise the above mention features and should only send out upon receiving a request signal from the external unit, thereby avoiding draining the battery. A surveillance signal may also automatically be sent out in the case of a capture, in the case of low battery power or in the case of loss of bait. The surveillance signal can any electromagnetic signal, such as a radio-signal, or a signal around 2,4 GHz which is the Bluetooth standard frequency. The trap can additionally comprise means for determining the geographical position of the trap. This can be achieved by incorporation a global positioning system device (GPS), a mobile positioning system device (MPS), such technology has been demonstrated by the Swedish

corporation Ericsson, or a Nordic Mobile Telephone (NMT) device. The surveillance signal can therefore further comprise the position of the trap. The electronic circuit can also be equipped with a means for receiving a command signal send out by the external unit. This would be useful if, for example, the trap is further equipped with a size adjustable  
 5 entrance opening.

Above, only the situation of a single trap is described. An ensemble of traps can be monitored by a software program adapted to store information on the identity code, the position, etc., of the individual traps in the network. The software should collect information about the number of captures, the condition of the bait, and the current power  
 10 on the battery. A trap keeper could then fast obtain an overview of the traps that are needed to be tended to.

#### **Brief description of the drawings**

15 In the following, a preferred embodiment of the invention will be described with reference to the drawing in which:

- Fig. 1 is a 3D cut of a preferred embodiment of the invention,
- Fig. 2 is an example of a voltage diagram,
- 20 Fig. 3 is a second preferred embodiment of a trapdoor,
- Fig. 4 illustrates the invention in connection with a closed receptacle, and
- Fig. 5 illustrates the invention mounted in a sewer.

#### **25 Detailed description of the Figs**

In Fig. 1, a 3D cut of a preferred embodiment of the present invention is presented. The trapping chamber is inside a housing which comprises sidewalls 1, a top 2 and a bottom section 3,4. The access to the trapping chamber is an opening in one end of the trap housing. The entrance is not shown, but it could be an opening in a wall adjacent to  
 30 the sidewall 14. The bottom section 3, 4 comprises two parts, one part 3 which is fixed with respect to the housing as a whole, and another part which is movable. The movable part 4 constitutes an exit, here illustrated as a trapdoor that opens in a downward direction. A set of electrodes comprising a first electrode 5, a second electrode 6 and a third electrode 7, are placed sequentially between the entrance and the section where the  
 35 bait 8, 9 and 16 is placed. From the bait reservoir 9, a scent-liquid is dripping into a small bowl 8. The bait reservoir may be re-filled from outside the trap 16, as the reservoir protrudes through the top section of the trap. The power source of the trap is a 12 V DC battery 10, placed on top of the trap. An electronic circuits 11 is also placed on top of the trap. The electronic circuit includes a means for communicating a surveillance signal. The  
 40 surveillance signal is transmitted through the antenna 15. The opening and closing of the trapdoor is actuated by a small motor 12 adapted to unroll and roll up a string in order to open and close the trapdoor.

The electronic circuit 11 comprises:

1. an electronic-print card with a microprocessor, a sensor circuit, a "power electronic" to drive the motor and the high voltage generator,
2. a motor to remove the animal from the trap chamber,
- 5 3. a display, and
4. a transmission system to remote read-out.

The sensor circuit is set to detect a leak current between the first electrode 5 and the third electrode 7, alternatively, between the second electrode 6 and the third electrode 7, by  
 10 detecting a finite resistance between the electrodes. It can be adjusted electronically to register a resistance between 2 k $\Omega$  and 500 k $\Omega$ . The electrodes are kept at a potential of maximal 4.5 V DC between captures. In case of a detection of a finite resistance between the first electrode 5 (or the second electrode 6) and 7, an electrocuting high-voltage  
 15 potential is generated between the same electrodes. The duration of the high-voltage potential can be adjusted electronically from 100 ms and up to permanent, with an output voltage between 500 V and 4 kV, and a transmitted power between 100 mW and 25 W. The potential change uses that the inductivity in the transformer when the period for the high voltage transformer is short. The duration is controlled by the microprocessor. The power in the electrocuting-process is changed by changing the duty-cycle of the voltage  
 20 transformer, the total power admitted is thereby controlled. Also the electrocuting voltage can be varied, one example is given in Fig. 2. The details of the variation in the voltage difference can be further elaborated upon using experience gained in experiments. The power-electronics control the motor, both with respect to speed, and with respect to the time the exit remains open. A circuit can be added which register when the motor stalls. A  
 25 display shows the number of electrocutions, the remaining amount of the bait as well as the current voltage on the accumulator. The transmission system should be of the wire-loop principle, as this does not require broadcasting approval. Furthermore, this type of system works at low frequencies and can be used to transmit through earth and water.

30 Fig. 2 gives an example of the voltage difference between first electrode 5 and the third electrode 7 versus time during the electrocuting process. At  $t=0$  the electrocuting voltage difference is generated. At  $t=t_1$  the voltage difference drops to a predefined level which is kept until  $t=t_2$  where the voltage difference is raised until a new pre-defined level. At  $t=t_{end}$  the voltage difference is set to zero.

35 Fig. 3 shows a second embodiment of the trapdoor 4, where instead of using a motor 11 and a string 13, the actuation of the trapdoor is an electromagnetic switch 30 adapted to open upon a signal from the electronic circuit 11. Due to the weight of the electrocuted animal, the trapdoor opens by pivoting around a pivot tap 31, and closes after release of  
 40 the animal due to counter weights, here exemplified by a threaded bolt 33 and a nut 32.

Fig. 4 and 5 show two examples of trap set-ups. In both Figs. the trap 20 is raised above the surroundings, and access to the trap chamber is ensured by a ramp 21. In Fig. 2 the trap is placed on top of a receptacle 22, into which the animals are dumped after the

electrocution. Where Fig. 4 present a trap set-up that can be used in many different locations, e.g. a store-house, a barn or a field, Fig. 5 envision a special case where the trap is placed directly above a sewer stream. In this situation the sewer it-self is used as a receptacle where the animals are dumped directly into after electrocution. The trap is fastened in the sewer by using length adjustable legs 23.

**Claims**

1. An electrically powered animal trap, which comprises
  - a set of electrodes for electrocution of an animal, and
- 5 - means for communicating a surveillance signal between the trap and an external surveillance unit.
  
2. A trap according to claim 1 further comprising
  - a bottom with an upwardly extending sidewall,
- 10 - a top section,
- at least one entrance, and
- an exit.
  
3. A trap according to any of the preceding claims wherein the trap defines a chamber
- 15 between an entrance and an end section, which end section supports arrangement of bait.
  
4. A trap according to any of the preceding claims wherein the electrodes are arranged sequentially in the direction of the chamber.
  
- 20 5. A trap according to any of the preceding claims further comprising means for lifting up the trap.
  
6. A trap according to claim 5, wherein the means for lifting comprises at least one leg.
  
- 25 7. A trap according to claim 6 wherein the at least one leg is adjustable in length.
  
8. A trap according to claim 7 wherein the adjustment of the length is actuated by pressurized gas.
  
- 30 9. A trap according to any of claims 6-8 wherein the legs are telescopic legs.
  
10. A trap according to any of the preceding claims, further comprising a receptacle for storing the electrocuted animals.
  
- 35 11. A trap according to claim 10 wherein the receptacle and the trap is sealed.
  
12. A trap according to any of the preceding claims further comprising an electronic circuit including at least one micro processor, wherein the electronic circuit is adapted to generate the high-voltage potential from a low voltage power source upon detection of an animal.
- 40 13. A trap according to claim 12 wherein the animal is detected by an electronic detector connected to the electronic circuit.



14. A trap according to claim 13 wherein electronic detector is adapted to detect motion of an animal.
15. A trap according to claim 13 or 14 wherein the electronic detector is adapted to detect weight of an animal.
16. A trap according to any of the claims 12-15 wherein the high-voltage potential is generated in pulses.
- 10 17. A trap according to claim 16 wherein the pulses are in the form of a sinusoidal wave, a step pulse or a series of pulses.
18. A trap according to any of the preceding claims wherein the set of electrodes comprises at least 3 electrodes.
- 15 19. A trap according to any of the preceding claims, wherein the surface of the electrodes is rough.
20. A trap according to claim 19 wherein the roughness of the surface is provided by adhering metal shavings to a metal plate.
21. A trap according to any of claims 18-20 wherein a first of the electrodes is connected to a second of the electrodes and wherein a third of the electrodes is electrically isolated from the first and second electrodes.
- 25 22. A trap according to claim 21 wherein the electrocuting is obtained by generating a high-voltage difference between the first and the third electrode.
23. A trap according to any of claims 12-22 wherein the power source for generating the high-voltage difference is a low voltage, high capacity DC-battery.
- 30 24. A trap according to claims 22 wherein the high-voltage potential is generated upon detection of a leak current through the animal between the first and second electrode.
- 35 25. A trap according to any of the preceding claims, further comprising a lever arm for detecting the presence of an animal.
26. A trap according to claims 25 where the high-voltage potential is generated when an animal moves the lever arm.
- 40 27. A trap according to any of the preceding claims further comprising an entrance ramp.
28. A trap according to claim 27, wherein the ramp is made from a material selected from the group consisting of: wood, plastic, stainless steal and nickel.

29. A trap according to any of the preceding claims further comprising a mount at the entrance such that an additional section can be mounted in front of the entrance.
- 5 30. A trap according to claim 29 wherein the mount section comprises an entrance tube.
31. A trap according to claim 30 wherein the tube has at least one bent.
32. A trap according to claims 30-31 wherein said tube possesses one of the following  
10 shapes: an s-form, an elbow, and a zigzag.
33. A trap according to any of the preceding claims further comprising a power adapter that allows direct connection to an existing power network.
- 15 34. A trap according to claim 33 wherein the power adapter is compatible with an input voltage with an AC-amplitude between 110 to 380 V.
35. A trap according to any of the preceding claims further comprising a battery charger.
- 20 36. A trap according to any of the preceding claims wherein the exit is operated automatically upon electrocution of an animal.
37. A trap according to claim 36, wherein the exit is actuated either electrically, hydraulically, pneumatically, mechanically or by any combination of these.
- 25 38. A trap according to any of the preceding claims wherein the exit is a trapdoor.
39. A trap according to any of the preceding claims wherein the electrodes are shielded from water flooding from above.
- 30 40. A trap according to any of the preceding claims wherein the electronic circuit is embedded in a waterproof housing.
41. A trap according to any of the preceding claims further comprising a water-level  
35 detector adapted to send out an electronic signal, in the case water is detected in a level above a predetermined level, and wherein the electronic circuit is adapted to react in response to an electronic signal from the water level detector by disabling the generation of the high-voltage.
- 40 42. A trap according to any of claims 12-41, wherein the electronic circuit stores an identification code for the trap.

43. A trap according to any of the preceding claims wherein the means for communicating a surveillance signal comprises means for transmitting a wireless signal to an external unit provided with a receiver for receiving such a surveillance signal.
- 5 44. A trap according to any of the preceding claims, further comprising a receiving unit for receiving a command signal from the external unit.
45. A trap according to any of claims 43-44, wherein the wireless signal is an electromagnetic signal.
- 10 46. A trap according to any of the preceding claims wherein the surveillance signal is only send out upon receiving a request signal.
47. A trap according to claim 45 wherein the electromagnetic signal is a radio-signal.
- 15 48. A trap according to any of claims 45-47, wherein the frequency of the electromagnetic signal is in the range 2.2 to 2.8 GHz.
49. A trap according to any of the preceding claims further comprising means for
- 20 determining the geographical position of the trap.
50. A trap according to any of the preceding claims, wherein the surveillance signal contains information about at least one of the following particulars:
- 25 - the number of captured animal,  
 - the condition of the battery,  
 - the remains of the bait, the position of the trap, and/or  
 - an identification code for the trap.
- 30 51. A trap according to any of claims 2-50 wherein the size of the entrance is adjustable.
52. A trap according to claim 51 wherein the size of the entrance is adjustable via the communication means.
- 35 53. A trap system comprising:
- at least one trap according to any of the preceding claims, and  
 - at least one external unit comprising:  
 - communication means for receiving a surveillance signal from the trap and optionally,  
 40 for transmitting a command signal to the trap, and  
 - computer processing means adapted in response to commands from computer software to read the status of either a single trap or an ensemble of traps.
54. A method for electrocuting an animal comprising the steps of:


- detecting an animal
- electrocuting the animal
- updating an information storage with information relating to a total number of
- 5 electrocutions, and
- transmitting a surveillance signal to an external unit, the surveillance signal comprising the information relating to the total number of electrocutions.

55. A method where an electrocuting trap comprises a water-level detector adapted to
- 10 send out an electronic signal, in the case the water level rises above a predetermined level, and wherein an electronic circuit for electrocution is adapted to react in response to an electronic signal from the water level detector by disabling the generation of the high-voltage.

15

Modtaget  
- 2 OKT. 2032  
PVS

Fig. 1

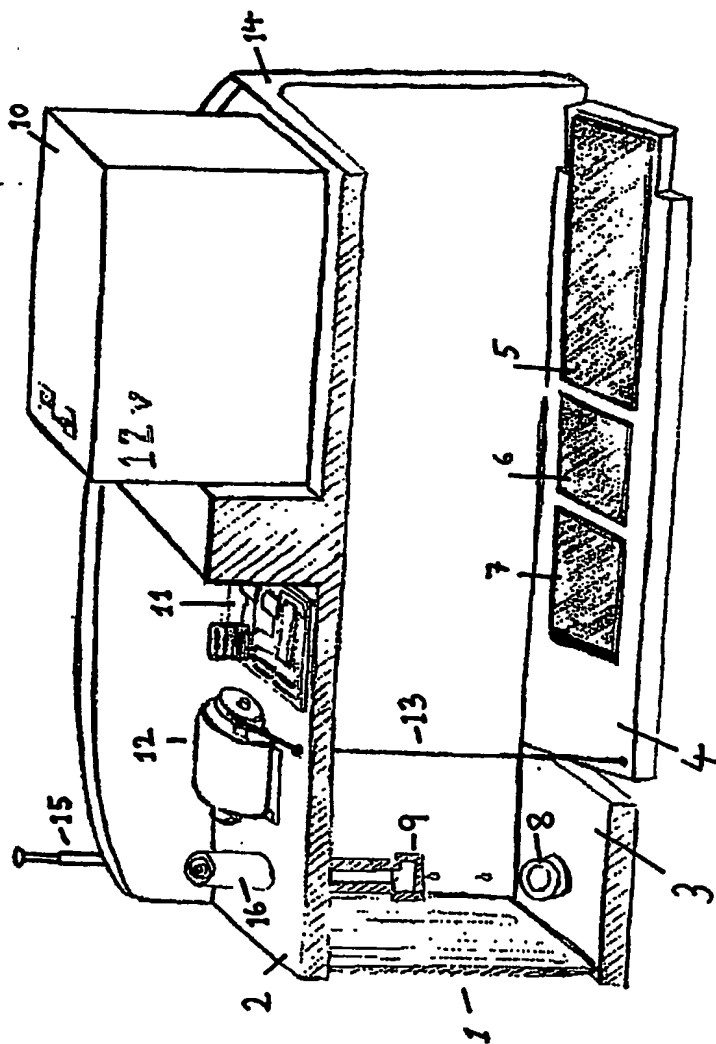

Modtaget  
- 2 OKT. 2002  
PVS

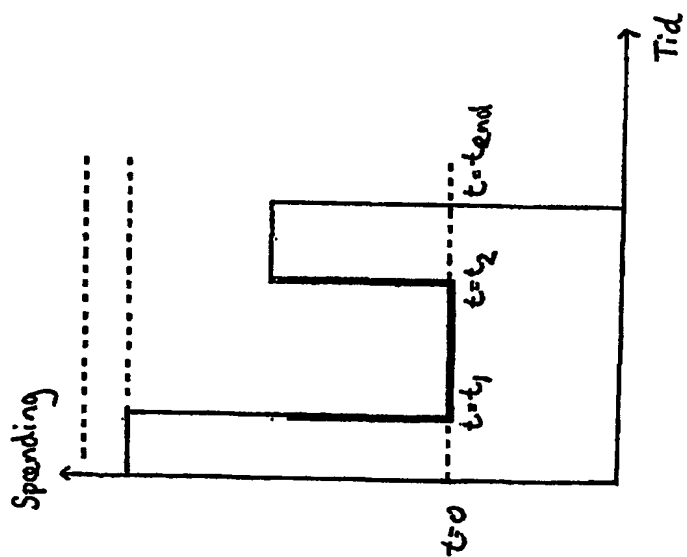
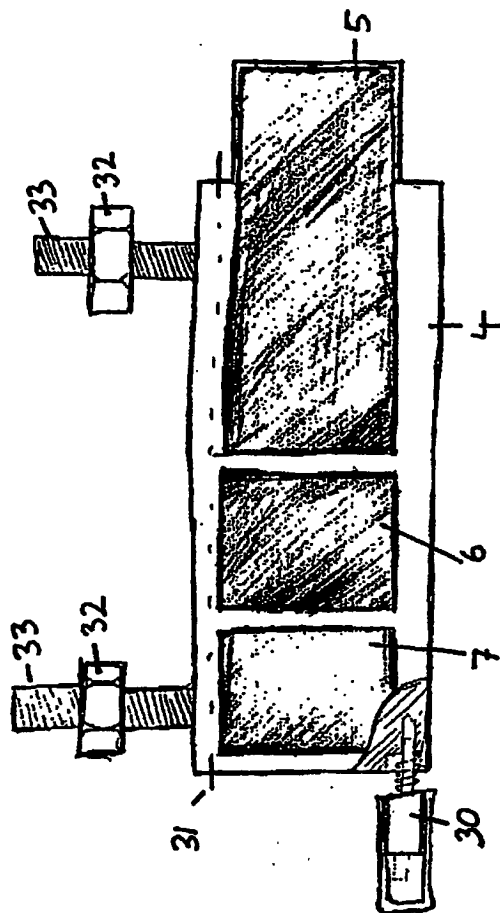


Fig. 2

Modtaget  
- 2 Okt. 2002  
PVS

Fig. 3



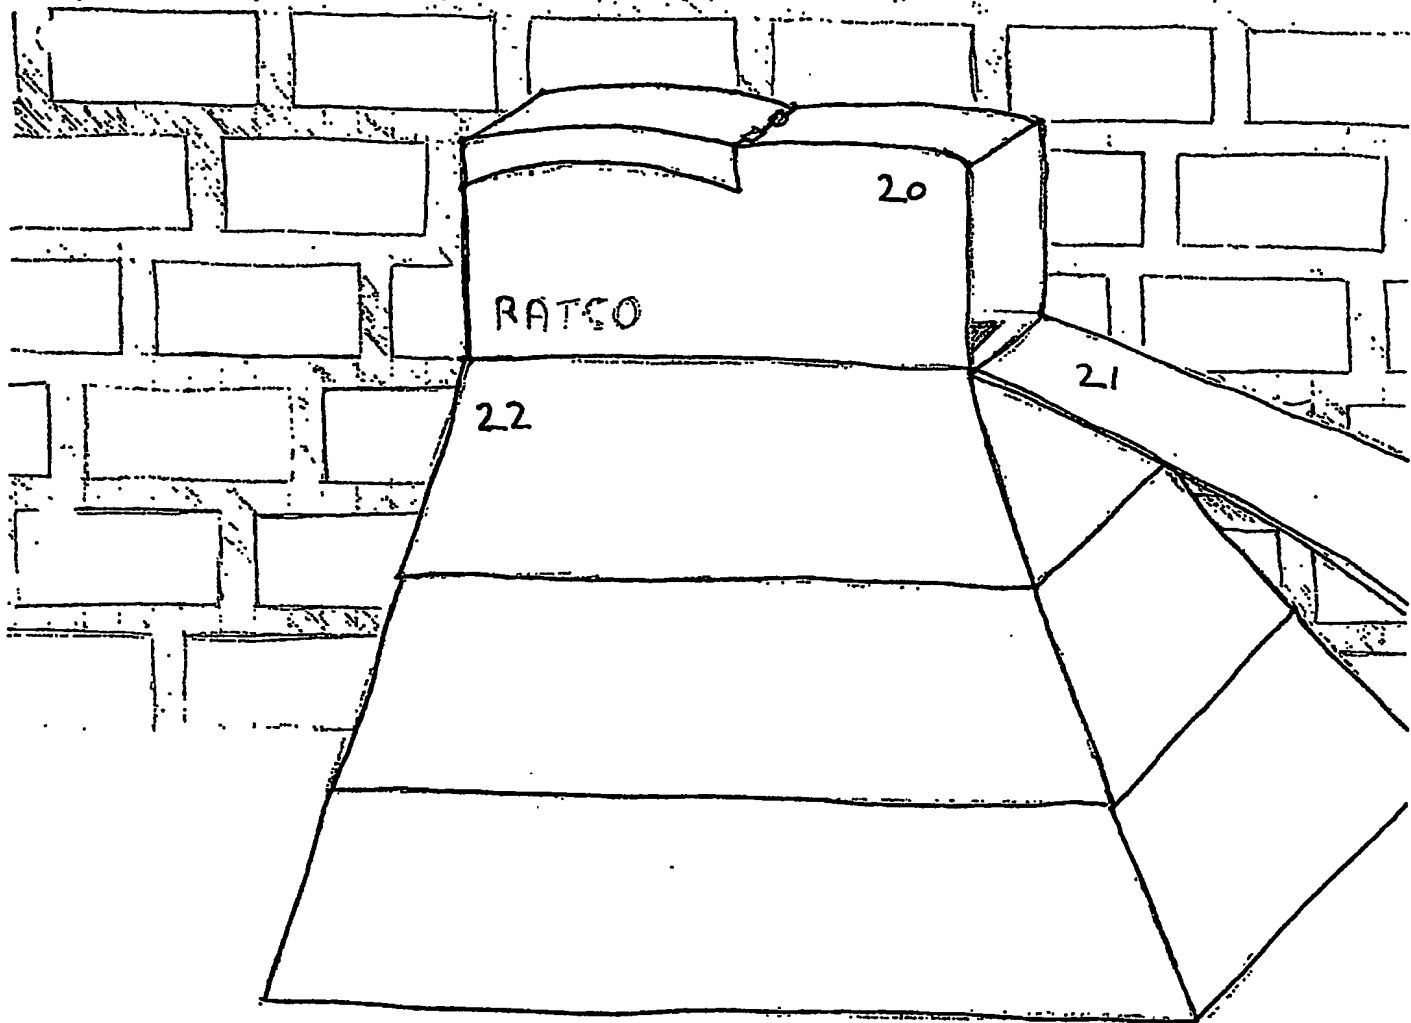


Fig. 4

Modtaget  
- 2 okt. 2002  
PVS



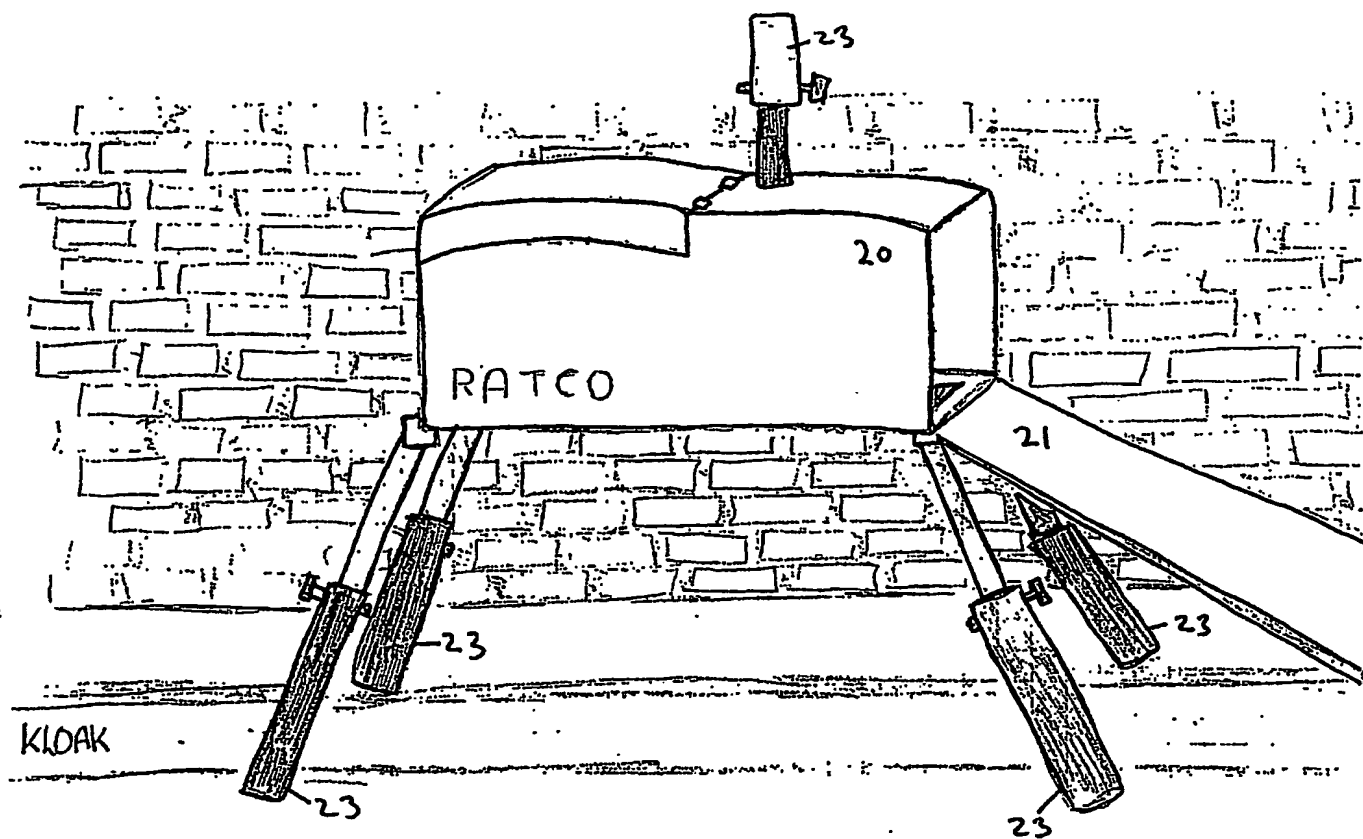


Fig. 5

Modtaget

- 2 OCT. 2002

PVS